

RFA250NFFdB




INPUT POWER: 250 Watts

PERFORMANCE SPECIFICATIONS:

Frequency Range: DC to 2.4 GHz
VSWR: 1.25:1 - DC to 1.0 GHz
1.35:1 - 1.0 to 2.4 GHz
Attenuation Value: 3 to 30 dB
Attenuation Accuracy: ± 0.30 dB or 3% DC to 1.0 GHz
 ± 0.75 dB or 5% 1.0 to 2.4 GHz
Peak Power: 2 kW max.
Nominal Size: (L,W,H) 10 1/2" x 4 1/8" x 4 1/8" max.
Weight: 6 1/2 lbs. (2.95 kg) max.

RFA500NFFdB

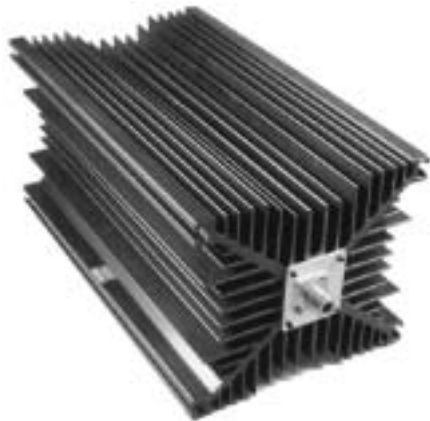

INPUT POWER: 500 Watts

PERFORMANCE SPECIFICATIONS:

Frequency Range: DC to 2.4 GHz
VSWR: 1.25:1 - DC to 1.0 GHz
1.35:1 - 1.0 to 2.4 GHz
Attenuation Value: 3 to 40 dB
Attenuation Accuracy: ± 0.30 dB or 3% DC to 1.0 GHz
 ± 0.75 dB or 5% 1.0 to 2.4 GHz
Peak Power: 2 kW max.
Nominal Size: 14" x 6 1/2" x 6" max. (3-6 dB)
17" x 6 1/2" x 6" max. (7 dB & up)
Weight: 16 lbs. (7.26 kg) max.

RFA1000NFFdB



INPUT POWER: 1000 Watts

PERFORMANCE SPECIFICATIONS:

Frequency Range: DC to 2.4 GHz
VSWR: 1.25:1 - DC to 1.0 GHz
1.35:1 - 1.0 to 2.4 GHz
Attenuation Value: 3 to 40 dB
Attenuation Accuracy: ± 0.30 dB or 3% DC to 1.0 GHz
 ± 0.75 dB or 5% 1.0 to 2.4 GHz
Peak Power: 2 kW max.
Nominal Size: 14" x 6 1/2" x 6" max.
Weight: 17 lbs. (7.70 kg) max.

(Fan note see section "E" cover sheet).