


General Specifications

Substrate: Alumina (3W), Beryllium Oxide (15W)
 Resistive Material: Thin Film
 Contact: Gold Plated Half Hard Beryllium Copper
 Housing: Nickel Plated Copper



Part Number	Impedance (Ohms)	Frequency (GHz)	VSWR (max)	Power (W)
RCL3-1	50	DC-4.0 4.0-8 8.0-18	1.10:1 1.20:1 1.35:1	3
RCL3-3				3
RCL3-4				3
RCL-15-1				15

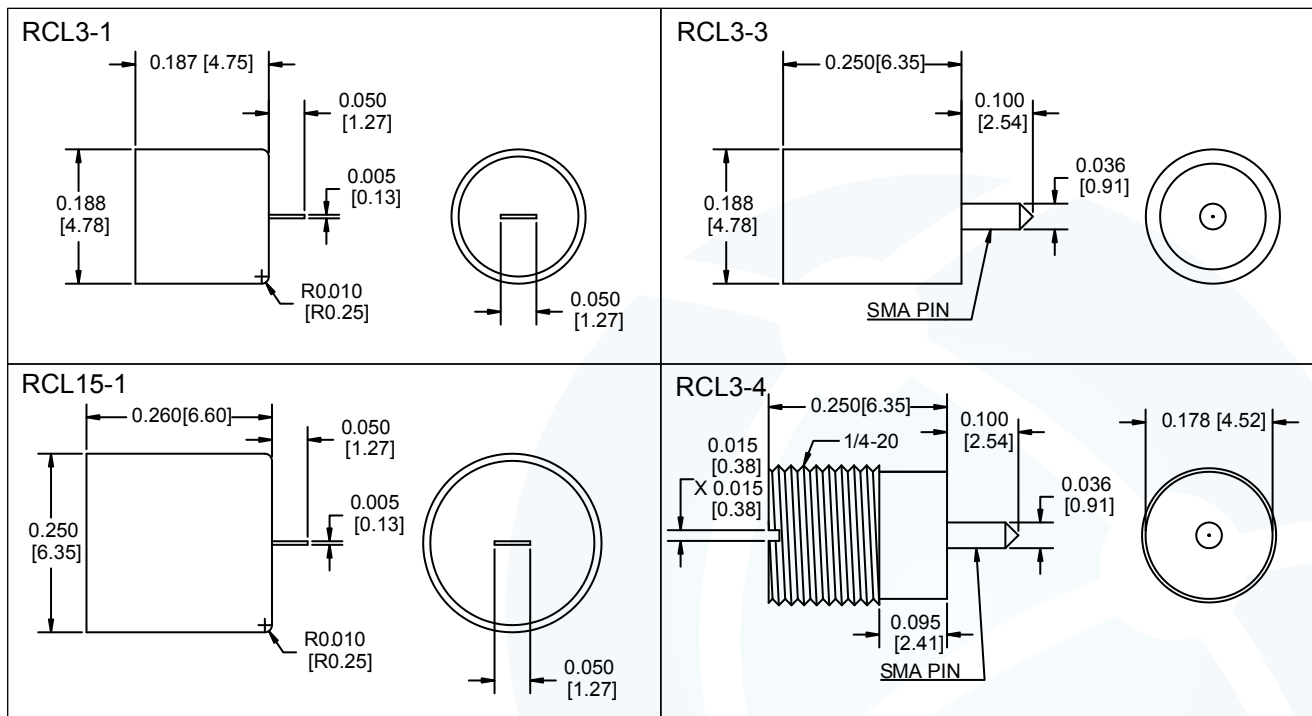

Dimensions are in inches [mm], Tolerance: .XXX = ±0.010, .XX = ±0.015

Ordering Information:

Example: **RCL 15 1**

Series → RCL
 Power → 15
 Tab (pin), housing configuration → 1

1: tab, standard housing
 3: pin, standard housing
 4: pin, threaded housing

