

COAXIAL ATTENUATORS CONVECTION COOLED N-TYPE RA SERIES




General Specifications

Connectors: N-Type Brass Nickel Plated
 Pins: Gold Plated Brass (Male); Gold Plated Beryllium Copper (Female)
 Housing: Black Anodized Aluminum
 Impedance: 50 Ohms
 Power rating 25W
 Temperature Range: -55°C to +125°C



Part Number	Attenuation Accuracy (dB)						Frequency (GHz)	VSWR (max)
	1-9	10	20	30	40	50		
RA025-2NMF-dB	±0.4	±0.4	±0.5	±0.5	±0.75	±1.0	DC-2.0 GHz	1.15:1
RA025-3NMF-dB	±0.4	±0.5	±0.6	±0.6	±1.0	±1.2	DC-3.0 GHz	1.20:1
RA025-4NMF-dB	±0.5	±0.6	±0.6	±0.6	±1.0	±1.5	DC-4.0 GHz	1.25:1
RA025-6NMF-dB	±0.5	±0.6	±0.75	±0.75	±1.0	±1.5	DC-6.0 GHz	1.25:1

RA025

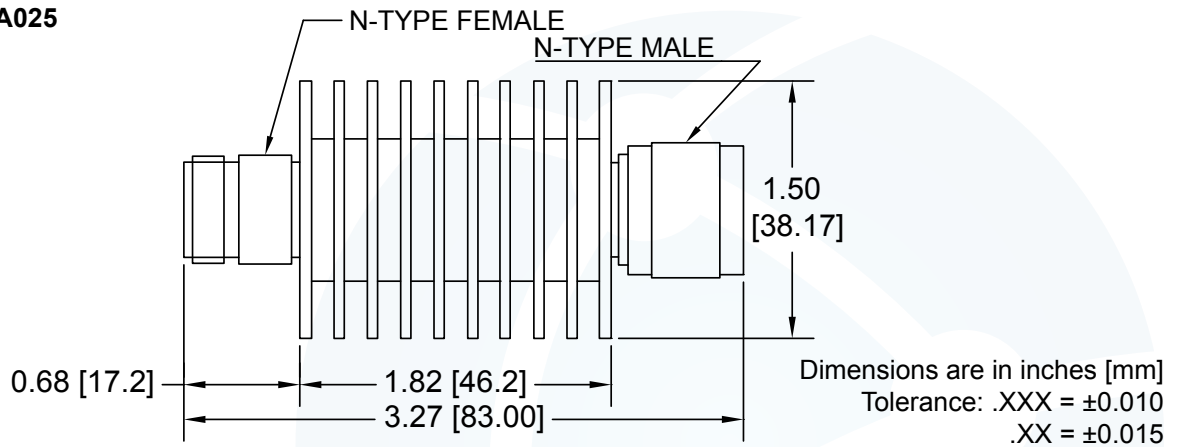

Ordering Information:

Example: **RA0 25 -4 NMF -dB**

Series ↑
 Power (W) ↑
 MAX Frequency (GHz) ↑
 12 = 12.4
 26 = 26.5
 N: N-Type ↑
 S: SMA ↑
 Male & Female Connectors ↑
 See Tables For Available Values ↑

